


# NanoVNA V2 (S-A-A 2) Structure Map

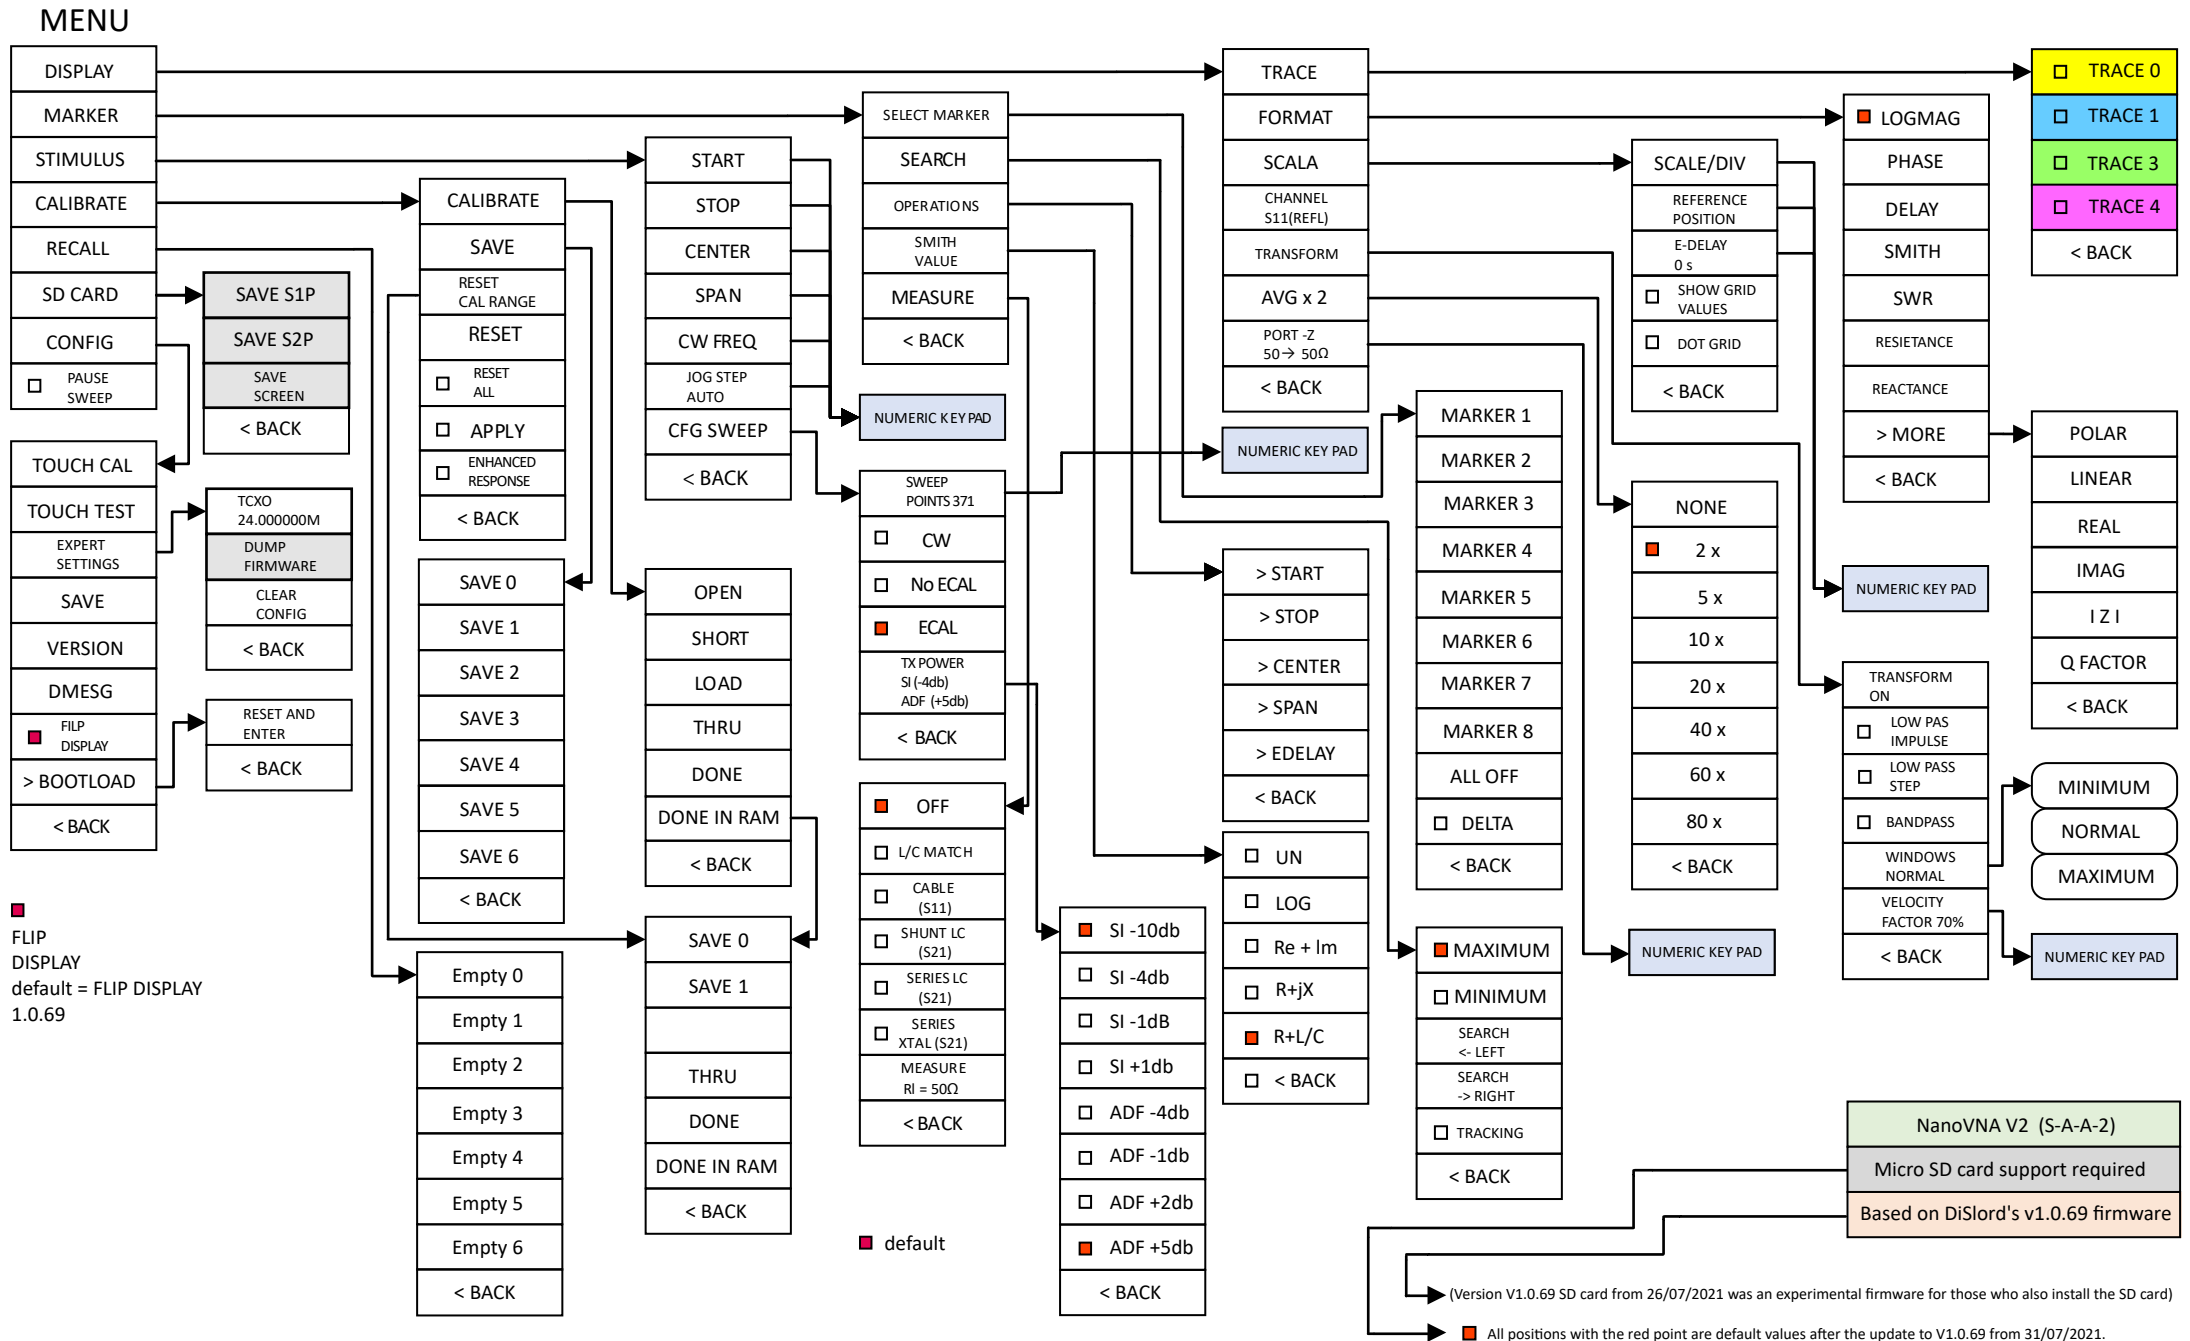

NanoVNA V2 (S-A-A-2)  
 Micro SD card support required  
 Based on DiSlord's v1.0.69 firmware

(Version V1.0.69 SD card from 26/07/2021 was an experimental firmware for those who also install the SD card)  
 ■ All positions with the red point are default values after the update to V1.0.69 from 31/07/2021.